



Commercial Lighting



OVIA[™]
ELECTRICAL

COMMERCIAL DOWNLIGHTS

Commercial Lighting



Beam Angle

90°

Wattage

24W

Lifetime

50000hrs

Voltage

220-240V

Dimmable

Yes

Ra

≥80

IP54 Dimmable 6" Integrated Vector Square Downlights

| Code | Finish | Lumens | Colour Temperature |
|---------------------|--------------|--------|--------------------|
| FDLVS6-24WLED3K-DW | White | 2000lm | 3000K |
| FDLVS6-24WLED4K-DW | White | 2200lm | 4000K |
| FDLVS6-24WLED3K-DSC | Satin Chrome | 2000lm | 3000K |
| FDLVS6-24WLED4K-DSC | Satin Chrome | 2200lm | 4000K |

c/w 1.2m pre-wired flex and 3 pin plug, and dimmable LED driver

Available Colour Temperature

Cool White

Warm White

Available Finishes

White


Satin Chrome

Product Approvals




Complies with BS EN 60598
All our Downlights are covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

Dimensions: 6 Inch 160mm Cut Out



Light Distribution



Beam Angle

90°

Wattage

36W

Lifetime

50000hrs

Voltage

220-240V

Dimmable

Yes

Ra

≥ 80



IP54 Dimmable 8" Integrated Vector Square Downlights

| Code | Finish | Lumens | Colour Temperature |
|---------------------|--------------|--------|--------------------|
| FDLVS8-36WLED3K-DW | White | 3000lm | 3000K |
| FDLVS8-36WLED4K-DW | White | 3300lm | 4000K |
| FDLVS8-36WLED3K-DSC | Satin Chrome | 3000lm | 3000K |
| FDLVS8-36WLED4K-DSC | Satin Chrome | 3300lm | 4000K |

c/w 1.2m pre-wired flex and 3 pin plug, and dimmable LED driver

Available Colour Temperature

Available Finishes

Cool White Warm White

White Satin Chrome

Product Approvals



Dimensions: 8 Inch 195mm Cut Out

Light Distribution



Complies with BS EN 60598

All our Downlights are covered by a 5 year warranty. Only valid once registered by calling (03) 9770 8694



COMMERCIAL DOWNLIGHTS

Commercial Lighting



Beam Angle

90°

Wattage

24W

Lifetime

50000hrs

Voltage

220-240V

Dimmable

Yes

Ra

≥80

IP54 Dimmable 6" Integrated Vector Round Downlights

| Code | Finish | Lumens | Colour Temperature |
|---------------------|--------------|--------|--------------------|
| FDLVR6-24WLED3K-DW | White | 2000lm | 3000K |
| FDLVR6-24WLED4K-DW | White | 2200lm | 4000K |
| FDLVR6-24WLED3K-DSC | Satin Chrome | 2000lm | 3000K |
| FDLVR6-24WLED4K-DSC | Satin Chrome | 2200lm | 4000K |

c/w 1.2m pre-wired flex and 3 pin plug, and dimmable LED driver

Available Colour Temperature

Cool White

Warm White

Available Finishes

White


Satin Chrome

Product Approvals




All our Downlights are covered by a 5 year warranty. Only valid once registered by calling (03) 9770 8694

Dimensions: 6 Inch 160mm Cut Out



Light Distribution



Beam Angle

90°

Wattage

36W

Lifetime

50000hrs

Voltage

220-240V

Dimmable

Yes

Ra

≥ 80



IP54 Dimmable 8" Integrated Vector Round Downlights

| Code | Finish | Lumens | Colour Temperature |
|---------------------|--------------|--------|--------------------|
| FDLVR8-36WLED3K-DW | White | 3000lm | 3000K |
| FDLVR8-36WLED4K-DW | White | 3300lm | 4000K |
| FDLVR8-36WLED3K-DSC | Satin Chrome | 3000lm | 3000K |
| FDLVR8-36WLED4K-DSC | Satin Chrome | 3300lm | 4000K |

c/w 1.2m pre-wired flex and 3 pin plug, and dimmable LED driver

Available Colour Temperature

Cool White Warm White

Available Finishes

White Satin Chrome



Product Approvals



All our Downlights are covered by a 5 year warranty. Only valid once registered by calling (03) 9770 8694

Dimensions: 8 Inch 195mm Cut Out

Light Distribution



DIFFUSED BATTEN

Commercial Lighting



Finish

White

Colour Temperature

4000K

Lifetime

40000hrs

Voltage

220-240V

Dimmable

No

Ra

≥80

Single Prime Diffused Batten

| Code | Description | Dimensions | Wattage | Lumens |
|--------------------|----------------------------|------------------|---------|--------|
| PLB-1/9WLED-DB-4K | Single 2FT Diffused Batten | 620 x 68 x 90mm | 1 x 9W | 720lm |
| PLB-1/16WLED-DB-4K | Single 4FT Diffused Batten | 1230 x 68 x 90mm | 1 x 16W | 1500lm |

Complete with LED Tube

Available Colour Temperature

Cool White

Available Finishes


White

Product Approvals



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

Light Distribution



Finish

White

Colour Temperature

4000K

Lifetime

40000hrs

Voltage

220-240V

Dimmable

No

Ra

≥ 80



Twin Prime Diffused Batten

| Code | Description | Dimensions | Wattage | Lumens |
|--------------------|--------------------------|-------------------|---------|--------|
| PLB-2/9WLED-DB-4K | Twin 2FT Diffused Batten | 620 x 125 x 93mm | 2 x 9W | 1500lm |
| PLB-2/16WLED-DB-4K | Twin 4FT Diffused Batten | 1230 x 125 x 93mm | 2 x 16W | 3000lm |

Complete with LED Tube

Available Colour Temperature

Cool White


Available Finishes

White

Product Approvals




Light Distribution



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

LINKABLE BATTENS

Commercial Lighting



Finish

White

Beam Angle

150°

Colour Temperature

3000K

Lifetime

25000hrs

Voltage

220-240V

Dimmable

No

Ra

≥80

IP20 T5 Club Linkable Battens

| Code | Dimensions | Wattage | Lumens |
|----------------|---------------|---------|--------|
| CLB5WLED-3K | 300mm x 35mm | 5W | 350lm |
| CLB9.5WLED-3K | 500mm x 35mm | 9.5W | 650lm |
| CLB11WLED-3K | 900mm x 35mm | 11W | 900lm |
| CLB13.5WLED-3K | 1100mm x 35mm | 13.5W | 1100lm |

Concealable narrow strip batten
Products include flex plug and connector as standard

Available Colour Temperature

Available Finishes


Warm White

White

Product Approvals



Light Distribution



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

Commercial Lighting

Finish

White

Beam Angle

150°

Colour Temperature

4000K

Lifetime

25000hrs

Voltage

220-240V

Dimmable

No

Ra

≥ 80



IP20 T5 Club Linkable Battens

| Code | Dimensions | Wattage | Lumens |
|----------------|---------------|---------|--------|
| CLB5WLED-4K | 300mm x 35mm | 5W | 400lm |
| CLB9.5WLED-4K | 500mm x 35mm | 9.5W | 700lm |
| CLB11WLED-4K | 900mm x 35mm | 11W | 1000lm |
| CLB13.5WLED-4K | 1100mm x 35mm | 13.5W | 1250lm |

Concealable narrow strip batten
Products include flex plug and connector as standard

Available Colour Temperature


Available Finishes

Cool White

White

Product Approvals

Light Distribution



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

BARE BATTEN

Commercial Lighting



Finish

White

Colour Temperature

4000K

Lifetime

40000hrs

Voltage

220-240V

Dimmable

No

Ra

≥80

Single Prime LED Bare Batten

| Code | Description | Dimensions | Wattage | Lumens |
|--------------------|------------------------|------------------|---------|--------|
| PLB-1/9WLED-BB-4K | Single 2FT Bare Batten | 620 x 68 x 90mm | 1 x 9W | 900lm |
| PLB-1/16WLED-BB-4K | Single 4FT Bare Batten | 1230 x 68 x 90mm | 1 x 16W | 1700lm |

Bare batten with tube wire guard is optional

Available Colour Temperature

Cool White

Available Finishes


White

Product Approvals



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

Light Distribution



Finish

White

Colour Temperature

4000K

Lifetime

40000hrs

Voltage

220-240V

Dimmable

No

Ra

≥ 80



Twin Prime LED Bare Batten

| Code | Description | Dimensions | Wattage | Lumens |
|--------------------|----------------------|-------------------|---------|--------|
| PLB-2/9WLED-BB-4K | Twin 2FT Bare Batten | 620 x 125 x 93mm | 2 x 9W | 1800lm |
| PLB-2/16WLED-BB-4K | Twin 4FT Bare Batten | 1230 x 125 x 93mm | 2 x 16W | 3400lm |

Bare batten with tube wire guard is optional

Available Colour Temperature

Cool White


Available Finishes

White

Product Approvals



Light Distribution



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

WIREGUARD - TO SUITE BARE BATTEN

Commercial Lighting



Wire Guard Cage

| Code | Description | Finish |
|--------------|----------------------------------|--------|
| WG CAGE-2FTS | To suite item PLB-1/9WLED-BB-4K | White |
| WG CAGE-2FTT | To suite item PLB-2/9WLED-BB-4K | White |
| WG CAGE-4FTS | To suite item PLB-1/16WLED-BB-4K | White |
| WG CAGE-4FTT | To suite item PLB-2/16WLED-BB-4K | White |

Available Finishes

White

Product Approvals



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

Finish

White

Colour Temperature

4000K

Lifetime

40000hrs

Voltage

220-240V

Dimmable

No

Ra

≥ 80



Diffused Strip Integrated Stellar LED Batten

| Code | Description | Dimensions | Wattage | Lumens |
|--------------|--------------------------------------|------------------|---------|--------|
| SLB21WLED-4K | 2FT Integrated Diffused Strip Batten | 600 x 80 x 65mm | 21W | 1750lm |
| SLB42WLED-4K | 4FT Integrated Diffused Strip Batten | 1200 x 80 x 65mm | 42W | 3500lm |

Available Colour Temperature

Cool White


Available Finishes

White

Product Approvals




Light Distribution



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

WEATHERPROOF & VANDAL RESISTANT BATTEN

Commercial Lighting



Finish

White

Colour Temperature

4000K

Lifetime

40000hrs

Voltage

220-240V

Dimmable

No

Ra

≥80

Single Tempest Weatherproof & Vandal Resistant Batten

| Code | Description | Dimensions | Wattage | Lumens |
|-----------------|---|-------------------|---------|--------|
| TLB-1/9WLED-4K | IP65 Single 2FT Tempest Weatherproof Batten | 660 x 93 x 100mm | 1 X 9W | 850lm |
| TLB-1/20WLED-4K | IP65 Single 4FT Tempest Weatherproof Batten | 1270 x 93 x 100mm | 1 X 20W | 1900lm |

Available Colour Temperature

Cool White

Available Finishes


White

Product Approvals



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

Light Distribution



Finish

White

Colour Temperature

4000K

Lifetime

40000hrs

Voltage

220-240V

Dimmable

No

Ra

≥ 80



Twin Tempest Weatherproof & Vandal Resistant Batten

| Code | Description | Dimensions | Wattage | Lumens |
|-----------------|---|---------------------|---------|--------|
| TLB-2/9WLED-4K | IP65 Twin 2FT Tempest Weatherproof Batten | 660 x 140 x 100mm | 2 X 9W | 1700lm |
| TLB-2/20WLED-4K | IP65 Twin 4FT Tempest Weatherproof Batten | 1270 x 1400 x 100mm | 2 X 20W | 3800lm |

Available Colour Temperature

Cool White


Available Finishes

White


Product Approvals



Light Distribution



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

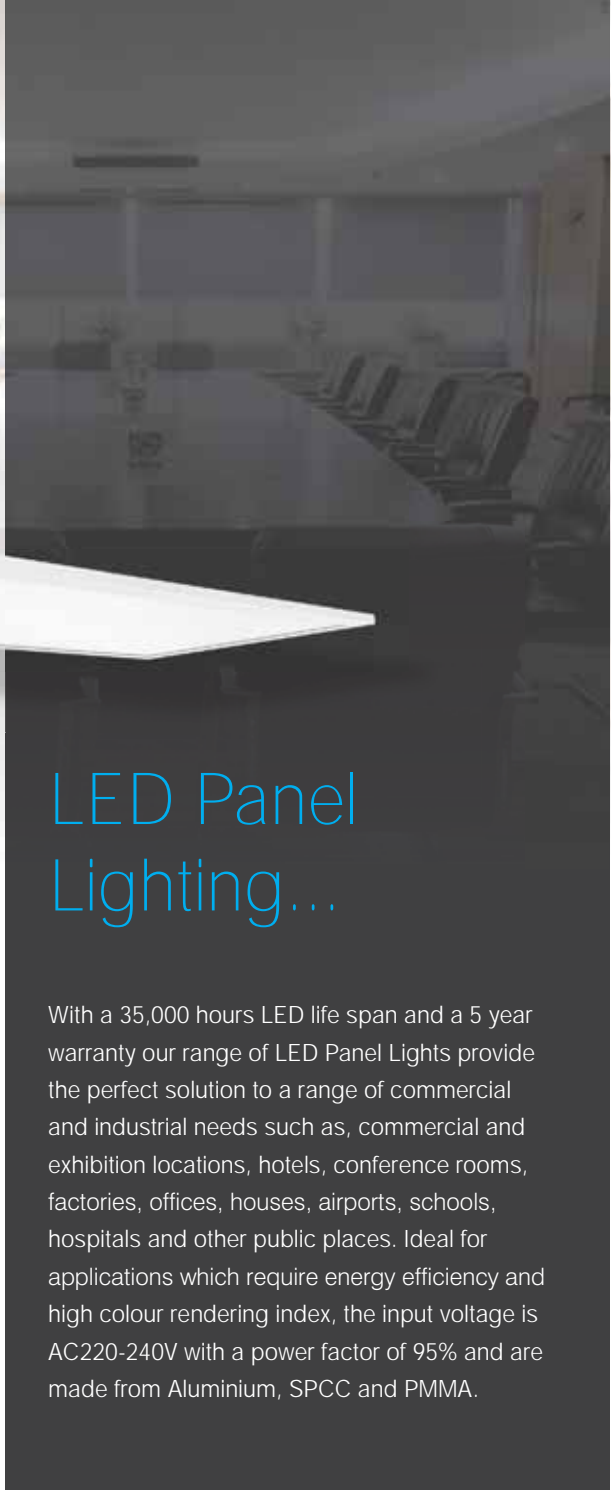

LED Panel Lighting...

With a 35,000 hours LED life span and a 5 year warranty our range of LED Panel Lights provide the perfect solution to a range of commercial and industrial needs such as, commercial and exhibition locations, hotels, conference rooms, factories, offices, houses, airports, schools, hospitals and other public places. Ideal for applications which require energy efficiency and high colour rendering index, the input voltage is AC220-240V with a power factor of 95% and are made from Aluminium, SPCC and PMMA.

Finish

White

Colour Temperature

3000K / 4000K / 5000K

Lifetime

35000hrs

Voltage

220-240V

Dimmable

No

Ra

≥ 80



Slim Panel

| Code | Dimensions | Wattage | Lumens |
|-------------------|----------------------|---------|--------|
| DLP17WLED300X600 | 595mm x 295mm x 9mm | 17W | 1500lm |
| DLP37WLED600X600 | 595mm x 595mm x 9mm | 37W | 3400lm |
| DLP37WLED1200X300 | 1195mm x 295mm x 9mm | 37W | 3400lm |
| DLP55WLED1200X600 | 1195mm x 595mm x 9mm | 55W | 4500lm |

Available Colour Temperature

Daylight

Warm White

Cool White


Available Finishes

White

Product Approvals



Light Distribution



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

PLASTER FRAME - TO SUITE SLIM PANEL

Commercial Lighting



Plaster Frame

| Code | Description | Dimensions |
|------------|---------------------------|-----------------------|
| PF625X325 | To Suit DLP17WLED300X600 | 625mm X 325mm X 40mm |
| PF625X625 | To Suit DLP37WLED600X600 | 625mm X 625mm X 40mm |
| PF1225X325 | To Suit DLP37WLED1200X300 | 1225mm X 325mm X 40mm |
| PF1225X625 | To Suit DLP55WLED1200X600 | 1225mm X 625mm X 40mm |

Available Finishes

White

Product Approvals



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694



Semi Flush Frame

| Code | Description | Dimensions |
|-------------|---------------------------|-----------------------|
| SFF600X320 | To Suit DLP17WLED300X600 | 600mm X 320mm X 18mm |
| SFF600X620 | To Suit DLP37WLED600X600 | 600mm X 620mm X 18mm |
| SFF1200X320 | To Suit DLP37WLED1200X300 | 1200mm X 320mm X 18mm |
| SFF1200X620 | To Suit DLP55WLED1200X600 | 1200mm X 620mm X 18mm |

Available Finishes

White

Product Approvals



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

SURFACE MOUNT FRAME - TO SUITE SLIM PANEL

Commercial Lighting



Surface Mount Frame

| Code | Description | Dimensions |
|-------------|---------------------------|-----------------------|
| SMF600X355 | To Suit DLP17WLED300X600 | 600mm X 355mm X 66mm |
| SMF600X655 | To Suit DLP37WLED600X600 | 600mm X 655mm X 66mm |
| SMF1200X355 | To Suit DLP37WLED1200X300 | 1200mm X 355mm X 66mm |
| SMF1200X655 | To Suit DLP55WLED1200X600 | 1200mm X 655mm X 66mm |

Available Finishes

White

Product Approvals



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694



Suspension Kit

| Code | Description | Dimensions |
|---------|-------------|------------|
| SKY-1.5 | Y type | 1.5m |
| SKI-1.5 | I type | 1.5m |

Product Approvals



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694



LED High Bay Lighting...

The housing of our energy efficient LED high bay units has an anodizing tensile reflector and has a patented cooling body design. The aluminium alloy lampshade and copper housing gives our energy efficient LED high bay units

Not only boasting a unique thermal design they have a constant current voltage control circuit, with a working Voltage of 100-277V 50/60Hz.

All LED High Bay lighting is available with a prismatic diffuser and these fixtures offer optional beam angles of 45°, 90° or 120°.

The LED high bay produces pure light with no ghosting. With an IP54 rating our LED High Bay fixtures are perfect for applications such as warehouses, gyms, assembly areas, food processing plants, cold storage and hangars.

With a 5 year warranty and a 50,000 hours LED life span why not replace your existing high bay fixture with an energy efficient LED high Bay unit.

Reflector Angle

45° 90° 120°

Colour Temperature

6500K

Lifetime

50000hrs

Voltage

100-277V

Dimmable

No



IP54 240V LED High Bay

| Code | Wattage | Lumens | Power Factor |
|-------------|---------|---------|--------------|
| HBLED30W6K | 30W | 3192lm | > .95 |
| HBLED50W6K | 50W | 4857lm | > .95 |
| HBLED80W6K | 80W | 8360lm | > .95 |
| HBLED100W6K | 100W | 10500lm | > .95 |
| HBLED120W6K | 120W | 12500lm | > .95 |
| HBLED150W6K | 150W | 15750lm | > .98 |
| HBLED200W6K | 200W | 20590lm | > .98 |

Please specify which beam angle you require when ordering

Product Approvals

Available Colour Temperature



Cool White

Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

Other colour temperatures available upon request.

Commercial Project Lighting



IP20 LED Troffer T Bar

| Code | Lumens | Colour Temperature |
|----------------------|--------|--------------------|
| CLT40WLED600X600-4K | 4000lm | 4000K |
| CLT40WLED1200X300-4K | 4000lm | 4000K |

T Bar High lumen output

Available Colour Temperature

Daylight

Warm White

Product Approvals



Covered by a 5 year warranty.
Only valid once registered by calling (03) 9770 8694

Light Distribution

